
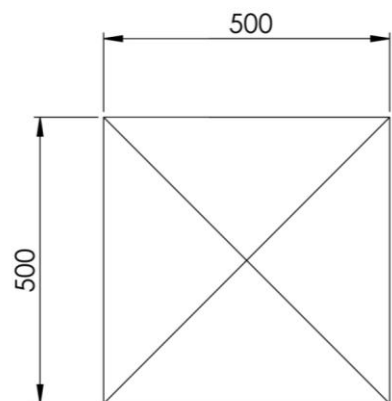


Pagodatent - ES 64

5 x 5m

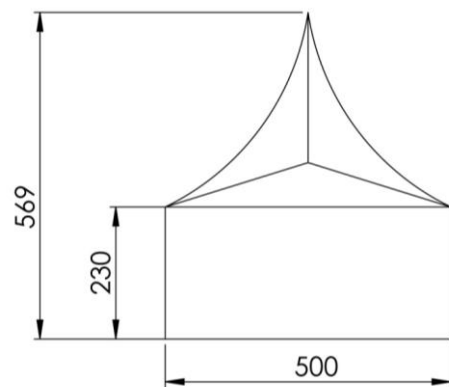

- ✓ **Fast and easy installation by two persons**
- ✓ **Fast delivery from stock**
- ✓ **Inhouse customisation and design**
- ✓ **Compact transport volume**
- ✓ **Constructed according to NEN-EN 13782**

|| Dimensions


Span width:	5.00 m
Eave high:	2.30 m
Ridge high:	5.69 m
Bay distance:	5.00 m
Roof pitch:	20° (Frame Pitch)
Longest component:	5.10 m
Minimum length:	5.00 m
Maximum length:	Can link tents together in all directions
Weight (5 x 5m):	Eave high 2.30m: ~ 200 KG
Transport volume:	5 x 5m: ~ 1.53m ³ (5.1 x 1 x 0.3m)

|| Specifications

Max allowed wind speed:	80 km/h (0.30kN/m ²)
Main profile:	63.8/63.8/2.4 mm (3 channel)
Connecting type:	Steel (galvanized) inserts
Aluminium type:	European Anodized Aluminium
Snow load:	Not calculated
PVC roof & wall covers:	Translucent 620gr/m ² or Opaque 750gr/m ²
	European UV-resistant and flame retardant according to: DIN 4102-B1, M2; BS 5438/7837; USA NFPA701
Included with product:	Statics NEN-EN 13782

|| Options

Roof:	- PVC (Translucent/transparent/colour/custom print)
Wall:	- PVC (Translucent/transparent/colour/custom print)
	- ABS walling (optional: double walls for isolation)
	- Glass walling (different types)
Doors:	- Single door
	- Double door
Floor:	- Cassette floor
	- Heavy duty floor

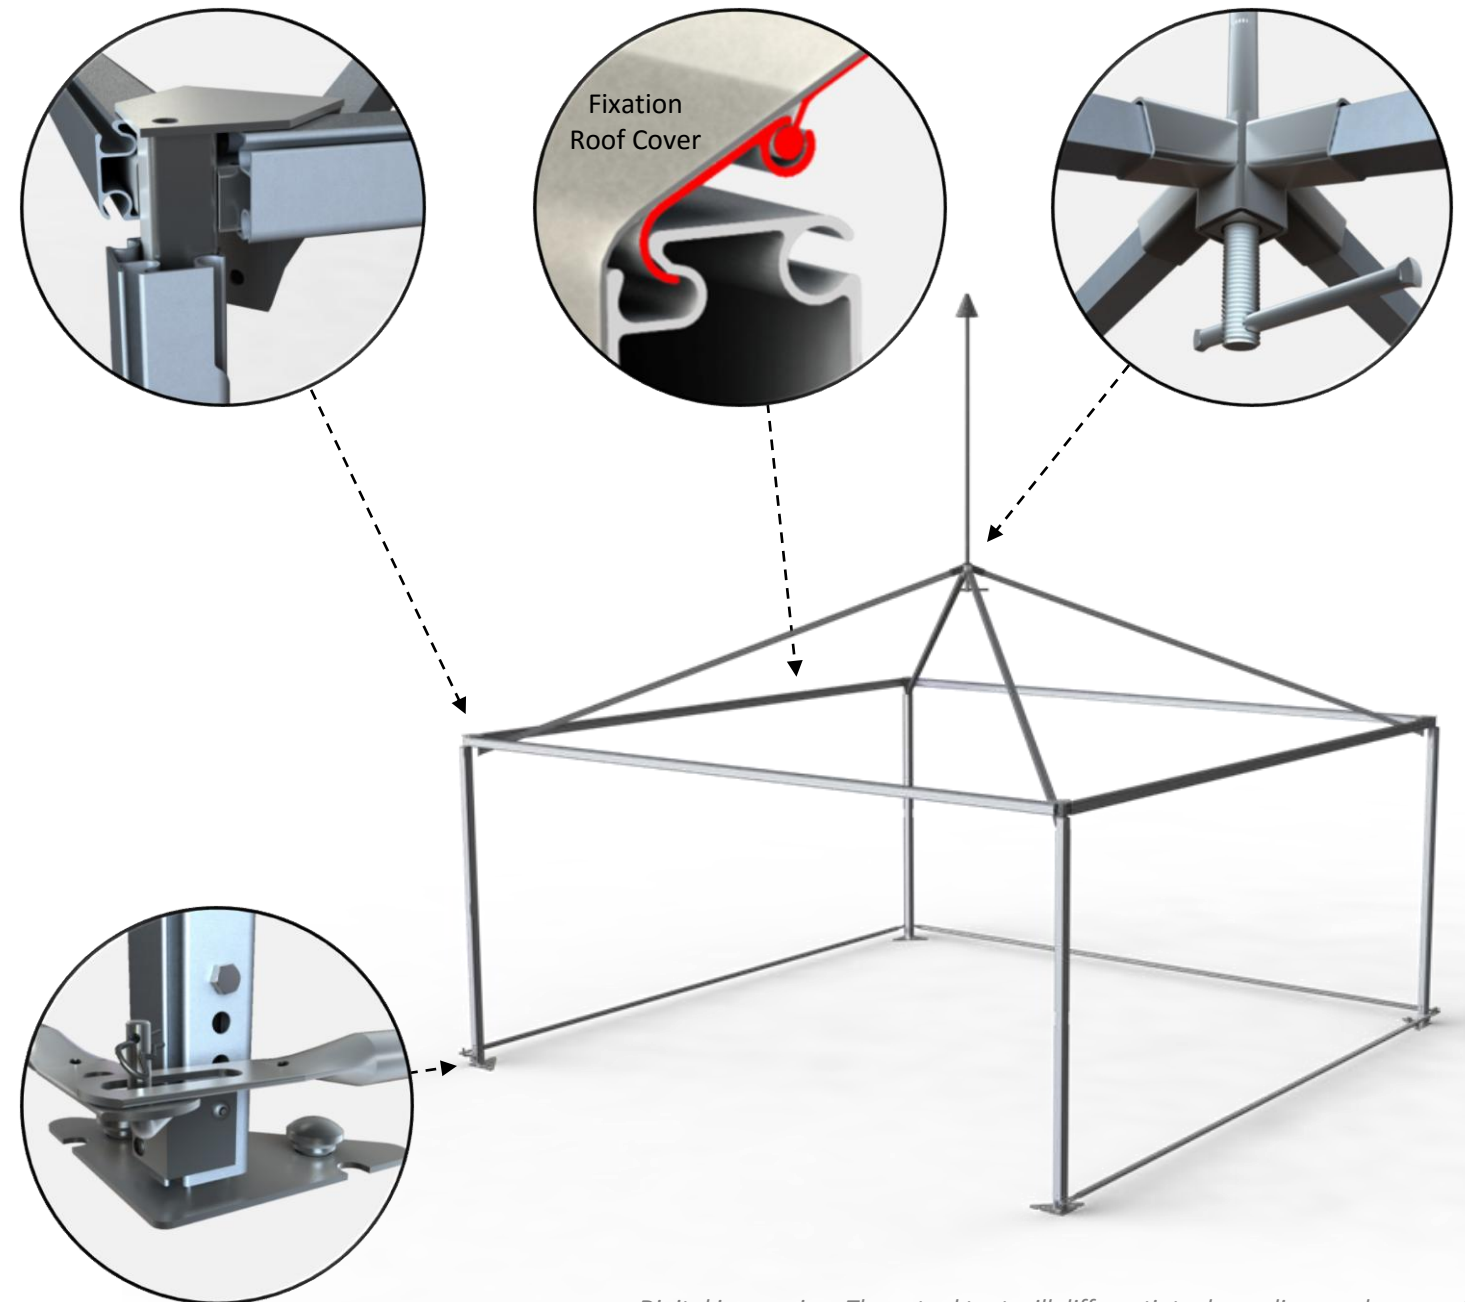

Digital impression; The actual tent will differentiate depending on chosen options