

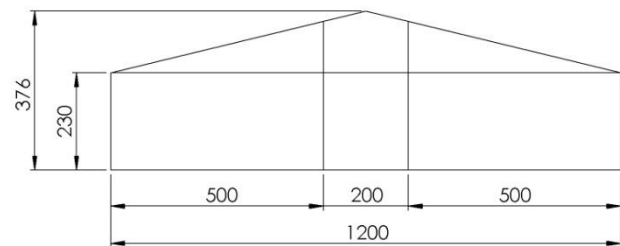


# Aluhal Event Serie 170

## 12m - A-frame

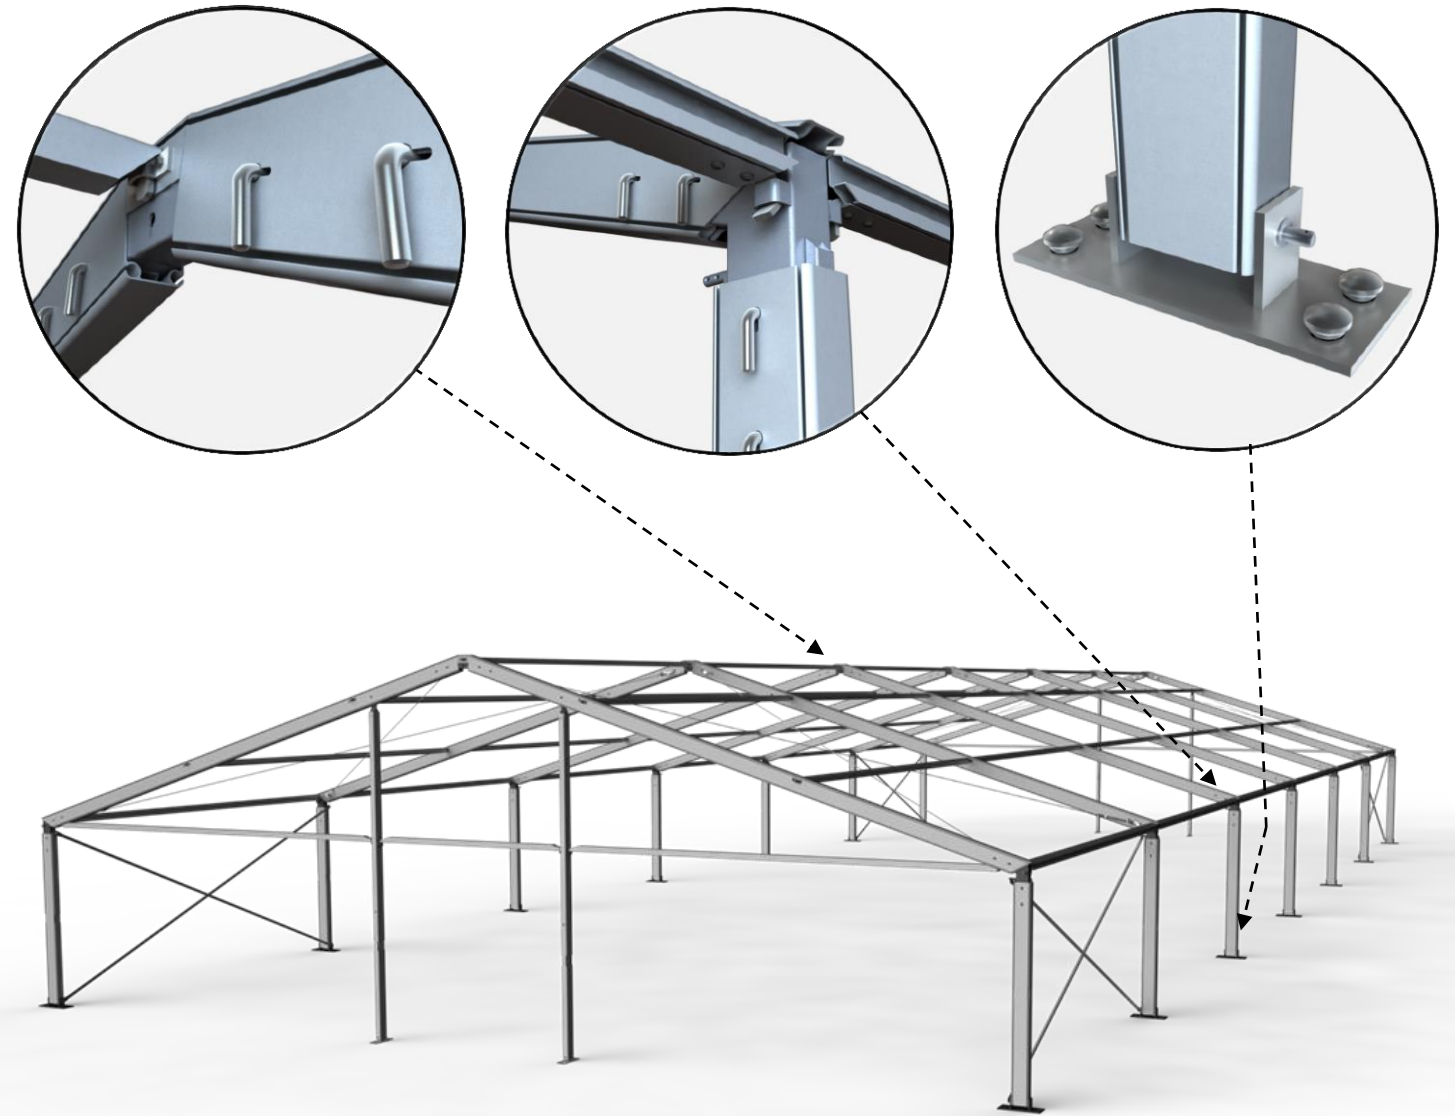

- ✓ **Fast and easy installation by three persons**
- ✓ **Fast delivery**
- ✓ **Inhouse customisation and design**
- ✓ **Compact transport volume**
- ✓ **Constructed according to NEN-EN 13782**

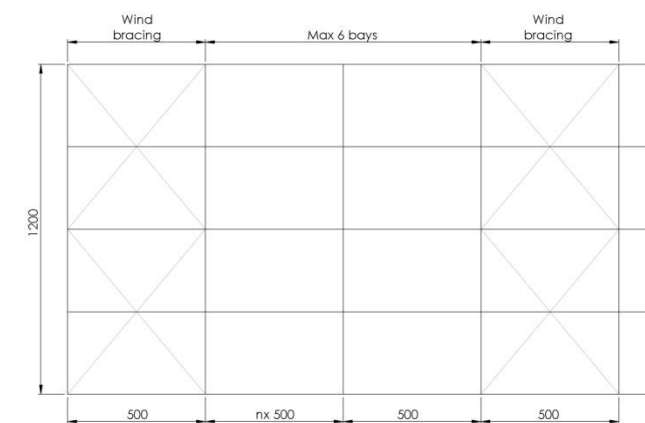

### || Dimensions

Span width:	12.00 m
Eave high:	2.30 / 3.00 m
Ridge high:	3.76 / 4.46 m
Bay distance:	5.00 m
Roof pitch:	18°
Longest component:	6.25 m
Minimum length:	5.00 m
Maximum length:	Unlimited in 5.00m segments
Weight (12 x 30m):	Eave high 2.30m: ~ 2.600 KG
Transport volume:	12 x 30m: ~ 11m <sup>3</sup> (5.5 x 2 x 1m)

### || Specifications

Max allowed wind speed:	100 km/h (0.5kN/m <sup>2</sup> )
Main profile:	170/88/3 mm (4 channel)
Connecting type:	Steel (galvanized) inserts
Aluminium type:	European anodized Aluminium
Snow load:	Not calculated
PVC roof & wall covers:	Translucent 620gr/m <sup>2</sup> or Opaque 750gr/m <sup>2</sup>
	European UV-resistant and flame retardant according to: DIN 4102-B1, M2; BS 5438/7837; USA NFPA701
Included with product:	Statics NEN-EN 13782

### || Options

Roof:	- PVC (Translucent/transparent/colour/custom print)
Wall:	- PVC (Translucent/transparent/colour/custom print)
	- ABS walling (optional: double walls for isolation)
	- Glass walling (different types)
Doors:	- Single door
	- Double door
Floor:	- Cassette floor
	- Heavy duty floor

*Digital impression; The actual tent will differentiate depending on chosen options*